


Case Study – Japanese Knotweed

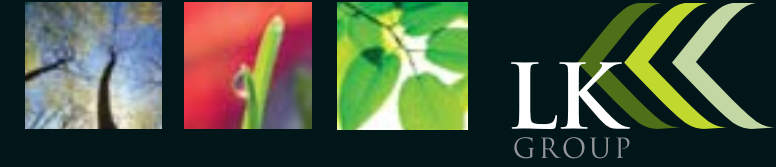

KEY FACTS

Who	Morgan Sindall
What	Japanese Knotweed Remediation
Where	Cardinal Heenan RC High School, Liverpool
How much	£45,000
How long	5 weeks

THE PROJECT

Approximately 875m² of Japanese Knotweed required remediation. Infestation which fell within development area was designated for excavation, whilst remaining areas would be subjected to a herbicide application.

THE SOLUTION

Our excavations varied between full and partial depth and were followed by the installation of a semi-permeable membrane. All excavations were backfilled using site-won clean material. We implemented a herbicide spraying and monitoring programme to control spread of Japanese Knotweed outside of the development area.

THE BENEFITS

Our effective, in situ remediation techniques eliminated any requirement to remove material from site. **Our client was able to avoid all transport and landfill costs associated with offsite removal.** Our works on-site were completed within a three week period.

